




Incremental rotary encoder ENI58IL-S

- Housing Ø 58 mm
- Solid shaft
- Servo or clamping flange
- Up to 5000 ppr
- Universal output driver
- BlueBeam technology for ultimate precision

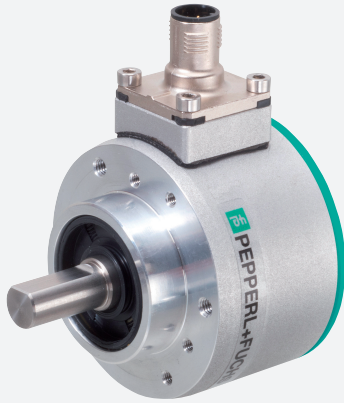


Function


The ENI58IL impresses with its modular design, which is available over all mechanical and electrical interfaces. The ENI58IL is the best solution for all common applications, coupled with its high robustness, high reliability and versatility. With the high-precision BlueBeam technology and innovative housing design, the ENI58IL is the new market standard for incremental encoders.

Dimensions


Clamping flange

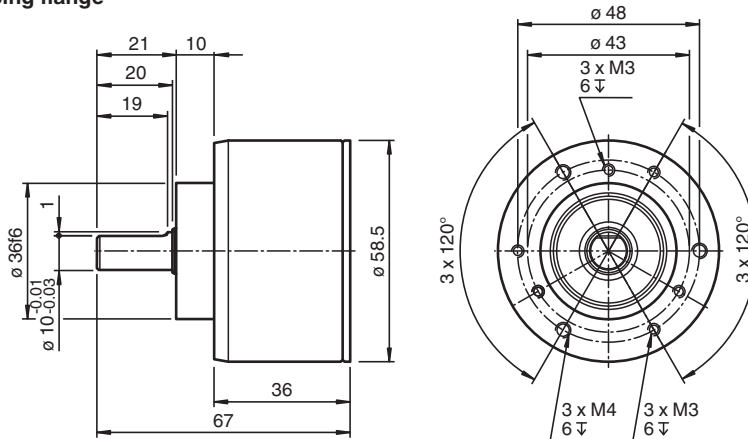

Servo flange

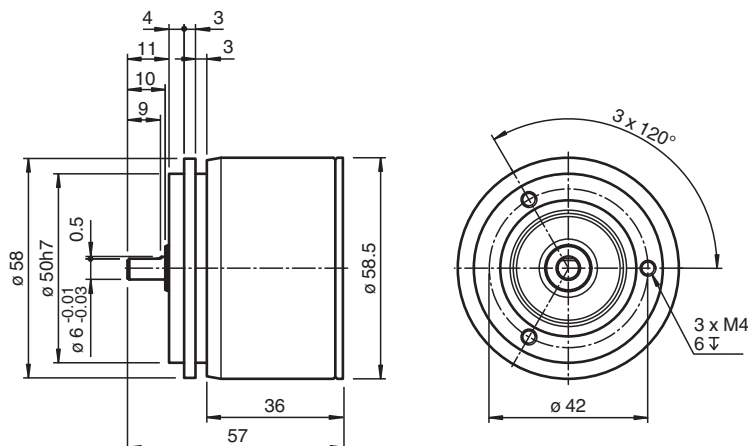

Connections

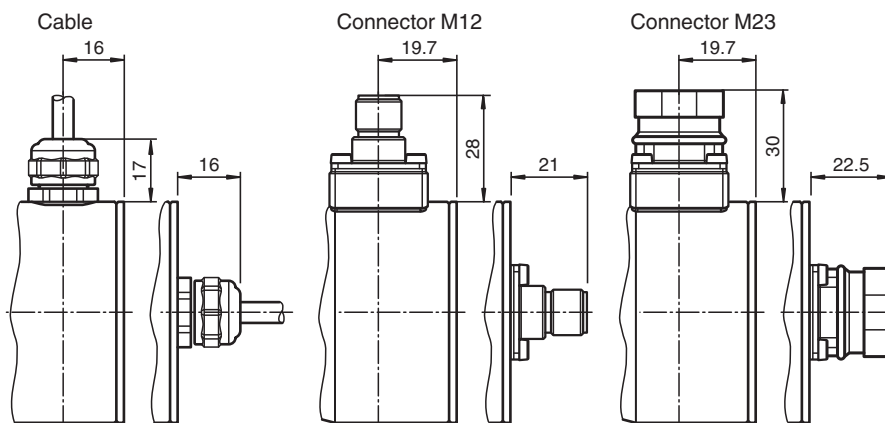

Technical Data

General specifications

Detection type	photoelectric sampling
Linearity error	$\pm 0.025^\circ$
Pulse count	max. 5000
UL File Number	E223176 "For use in NFPA 79 Applications only", if UL marking is marked on the product.

Functional safety related parameters

MTTF _d	140 a
Mission Time (T _M)	20 a
L ₁₀	70 E+9 at 6000 rpm
Diagnostic Coverage (DC)	0 %

Electrical specifications

Operating voltage	U _B	4.75 ... 30 V DC
No-load supply current	I ₀	max. 50 mA

Output

Output type	push-pull or RS422 (universal output driver, output level depending on input voltage)
Load current	max. per channel 40 mA, short-circuit protected, reverse polarity protected
Output frequency	max. 400 kHz
Rise time	300 ns
Phase position A to B	
Pulse counts < 3600	90° ± 9° electrical
Pulse counts ≥ 3600	90° ± 15° electrical
Duty cycle	1/2 ± 10 %

Connection

Connector	M12 connector, 8-pin M12 connector, 5 pin M23 connector, 12-pin
Cable	Ø6 mm, 4 x 2 x 0.14 mm ² Fixed cable with M12 plug, 5-pin Fixed cable with M12 plug, 8-pin

Standard conformity

Degree of protection	DIN EN 60529, IP65, IP67
Climatic testing	DIN EN 60068-2-78, no moisture condensation
Emitted interference	EN 61000-6-4:2007/A1:2011
Noise immunity	EN 61000-6-2:2005
Shock resistance	DIN EN 60068-2-27, 300 g, 6 ms
Vibration resistance	DIN EN 60068-2-6, 30 g, 10 ... 2000 Hz

Approvals and certificates

UL approval	cULus Listed, General Purpose, Class 2 Power Source, Type 1 enclosure, if UL marking is marked on the product. adapters providing field wiring on request
-------------	--

Release date: 2021-03-26 Date of issue: 2021-03-26 Filename: t182005_eng.pdf

Technical Data

Maximum permissible ambient temperature	max. 80 °C (max. 176 °F)
Ambient conditions	
Operating temperature	-40 ... 85 °C (-40 ... 185 °F) , fixed cable -5 ... 85 °C (23 ... 185 °F) , movable cable
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Material	
Housing	3.2315 aluminum (AlMgSi1, saltwater-proof)
Flange	3.2315 aluminum (AlMgSi1, saltwater-proof)
Shaft	Solid shaft Stainless steel
Mass	< 300 g without cable
Rotational speed	max. 12000 min ⁻¹ for IP65 , max. 6000 min ⁻¹ for IP67
Moment of inertia	≤ 35 gcm ²
Starting torque	≤ 1 Ncm for IP65 , ≤ 2.5 Ncm for IP67
Shaft load	
Axial	40 N at max. 6000 min ⁻¹ 10 N at max. 12000 min ⁻¹
Radial	80 N at max. 6000 min ⁻¹ 20 N at max. 12000 min ⁻¹

Accessories

	9416	Female cordset
	9416L	Female cordset
	MBT-36ALS	Spring-loaded mounting bracket with a diameter of 36 mm
	9203	Angled flange
	9401 10*10	Spring steel coupling
	9402 6*6	Spring steel coupling
	9404 6*6	Spring disk coupling
	9404 10*10	Spring disk coupling
	9408 10*10	Double loop coupling 10 x 10
	9409 6*6	Bellows coupling
	9409 10*10	Bellows coupling
	9410 6*6	Precision coupling

Release date: 2021-03-26 Date of issue: 2021-03-26 Filename: t182005_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Accessories


	9410 10*10	Precision coupling
	V19-G-5M-PVC-TP	Female cordset, M12, 8-pin, shielded, PVC cable
	V19-G-2M-PVC-TP	Female cordset, M12, 8-pin, shielded, PVC cable
	V19-G-10M-PVC-TP	Female cordset, M12, 8-pin, shielded, PVC cable
	V19-G-BK2M-PUR-U	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable black, UL approved
	V19-G-BK5M-PUR-U	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable black, UL approved
	V19-G-BK10M-PUR-U	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable black, UL approved
	9416-*M-12P-RXI58	Female cordset, M23, 12-pin, PVC cable, 11-core

Connection

Signal	Cable	Connector M23, 12-pin, clockwise	Connector M23,12-pin, counterclockwise	Connector M12 x 1, 8-pin	Connector M12 x 1, 5-pin
GND	White	10	10	1	3
U_b	Brown	12	12	2	1
A	Green	5	5	3	2
B	Grey	8	8	5	4
$\bar{A}$	Yellow	6	6	4	-
$\bar{B}$	Pink	1	1	6	-
Z	Blue	3	3	7	5
$\bar{Z}$	Red	4	4	8	-
NC	Violet	2	2	-	-
NC	Grey/Pink	7	7	-	-
NC	-	9	9	-	-
NC	Black	11	11	-	-
Shielding	Shield	Housing	Housing	Housing	Housing
	Note: Unused cores must be insulated individually before commissioning in order to avoid interference.				

Operation

Signal outputs

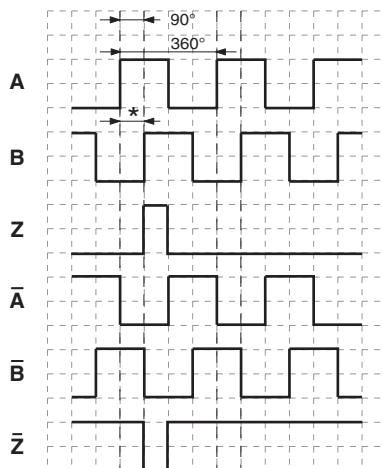

↺ cw - with view onto
 the shaft
 phase relationships
 electrical
 * 1 Measuring step is
 90° electrical

Type Code

E	N	I	5	8	I	L	-	S						-					-					
																							Connection type	
																							B2	Fixed cable with M12 plug, 8-pin, 1 m
																							B4	Fixed cable with M12 plug, 5-pin, 1 m
																							C1	Cable, 1 m
																							C2	Cable, 2 m
																							C5	Cable, 5 m
																							CA	Cable, 10 m
																							AA	M23 device plug, clockwise (type 9416)
																							AB	M23 device plug, counterclockwise (type 9416L)
																							BE	M12 device plug, 8-pin (type V19)
																							BD	M12 device plug, 5-pin (type V15)
																							Connection alignment	
																							A	axial
																							R	radial
																							Electrical interface	
																							UD1	Universal output driver UB 5 V ... 30 V
																							UD2	RS422, U _B 5 V ... 30 V
																							Pulse count	
																							0100, 0120, 0125, 0200, 0256, 0360 , 0500, 1000 , 1024 , 1250, 1500, 1800, 2000, 2048 , 2500 , 3600, 4000, 4096 , 5000	
																							Degree of protection	
																							5	IP65
																							7	IP67
																							Flange	
																							CA	Clamping flange
																							SA	Servo flange
																							Shaft diameter	
																							06	6 x 10 mm
																							08	8 x 20 mm
																							10	10 x 20 mm
																							12	12 x 20 mm
																							Shaft type	
																							S	Solid shaft
																							Version	
																							IL	Industrial Line
																							Size	
																							58	Housing diameter 58 mm
																							Device type	
																							ENI	Incremental rotary encoder
																							Note: Preferred options are in bold letters.	