

Socket model ES 15/4N

ES154NCNER - Pack. 10/220 pcs

Relay socket model ES 15/4N for industrial relay with 4 PDT, 2/2 level, screw connections, connection facility for input interference suppression modules.

Rated current / Rated voltage 12 A / 300 VAC (CSA)
10 A / 300 VAC (UL)


Dielectric strength adjacent contact circuits 2500V
 Dielectric strength coil contact circuits 2500V

Connection data

Conductor cross section solid and stranded min. 0,5 mm²
 Conductor cross section solid and stranded max. 2,5 mm²
 Conductor cross section AWG min. 20
 Conductor cross section AWG max 14
 Stripping length 7 mm
 Screw thread M3

General data

Width 27 mm
 Height 75 mm
 Color Black
 Ambient temperature (operation) -25 °C ... 85 °C

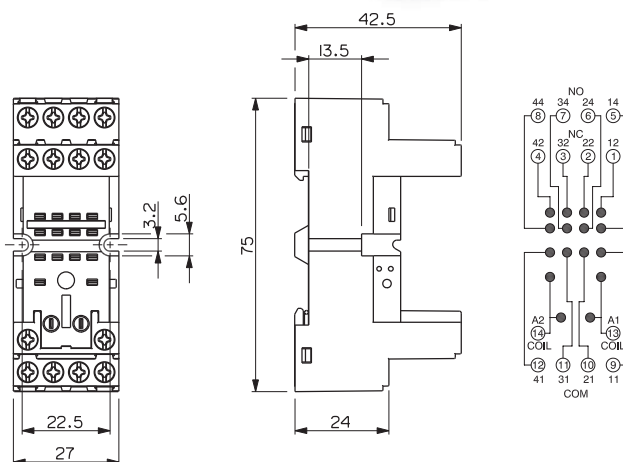

Accessories



Model MH 35

MH35 - Pack. 10/1000 pcs

Spring for relay securing
 Material: X Cr Ni Steel
 Relay height: 33,5-35,5 mm

Model MH 30

MH30 - Pack. 100/1000 pcs

Spring for relay securing
 Material: X Cr Ni Steel
 Relay height: 28-30 mm



Model TR1

TR1 - Conf. 10/1000 pz.

Plate for ES15/4-3-2N,
 ES15/4-3-2S

codice gestito a scorta



Model MS 30 B

MS30B - Pack. 10/100 pcs

Spring for relay securing and releasing
 Material: Thermoplastic
 Relay height: 28-30 mm



Model MS 30 C

MS30C - Pack. 10/100 pcs

Spring for relay securing and releasing
 Material: Thermoplastic
 Relay height: 28-30 mm



Model MS 35 B

MS35B - Pack. 10/100 pcs

Spring for relay securing and releasing
 Material: Thermoplastic
 Relay height: 33,5-35,5 mm



Model MS 35 C

MS35C - Pack. 10/100 pcs

Spring for relay securing and releasing
 Material: Thermoplastic
 Relay height: 33,5-35,5 mm