

REFLEX - HIGH POWERED PHOTOELECTRIC SENSORS AND AMPLIFIERS

OEM201N24AD
Amplifier relay 24 Vac/dc

- Small photoelectric sensors with long distances
- Able to withstand dirty environments
- Amplifier with timer function
- Amplifier with one or two channels




PRODUCT DESCRIPTION

TECHNICAL DATA

Electrical connection	11-pole base
Material of body	ABS plastic
Power consumption	2,8 W
Reaction time	65 ms
Supply voltage ac/dc max	24 V
Supply voltage ac/dc min	24 V
Temperature operational max	60 °C
Temperature operational min	-20 °C

OEM201N

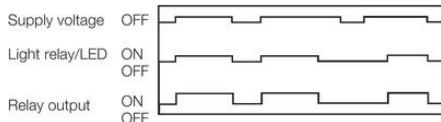

OEM201N
OEM202N

