

Key switch NS 1/2/3 – ASSA/HM/iLOQ

Description

Key switch to maneuver any ASSA or KABA cylinders. iLOQ also available.

ASSA eller KABA-cylindrar	typ 570, 5 stift typ 770, 7 stift med oval frontring typ 1576 eller med rund frontring typ 1776.
iLOQ	C10

Executions:

Standard variants:

NS-1 Springback. The key cannot be extracted in the affected position.

NS-2 Remaining. The key cannot be extracted in the affected position.


NS-3 Remaining. The key can be extracted in the affected position.



NS-1



NS-2

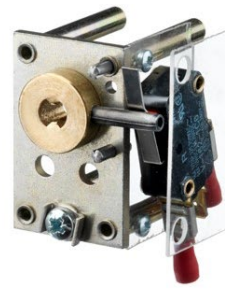

NS-3

Extra options:

- Vandal proof (extra switch with long straight arm)
- Vertical (switch mounted on the upper side)
- Double switch (One on each side)
- 1-pole switch (standard) or 2-pole switch (dead man's handle)
- DB = Double switch on the same side. Only available for 2-pole switch.

1-pole, switching (standard)

Microswitch with 1-pole switching contact. 1NC/NO.

0,6A 125VDC at resistive load.

The switch is mounted on the front plate's backside with two screws MRX M5x22mm. Minimum 50mm available depth is required.

2-pole microswitch (dead man's handle)


Microswitch with 2-pole contact. 1NO+1NC.

5A, 250V at resistive load.

The switch is mounted on the front plate's backside with two screws MRX M5x22mm. Minimum 50mm available depth is required.

Available with one or double switch (DB) on the same side.


Different configurations:

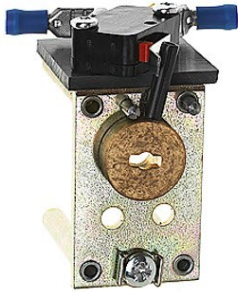


Vertical




Vandal

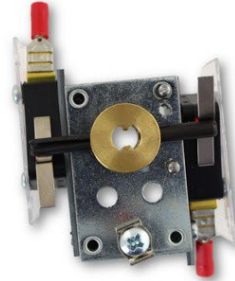



Double

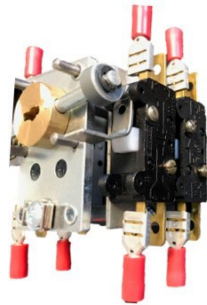

2-pole microswitch, DB,
dead man's handle, double

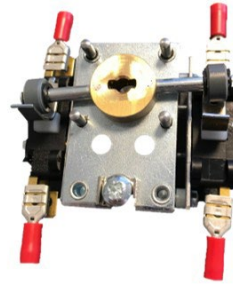

2-pole microswitch, dead
man's handle, double

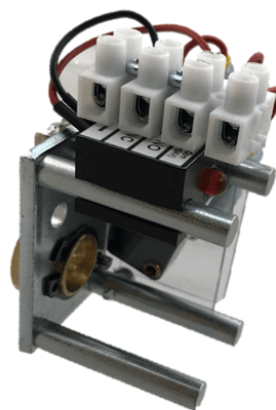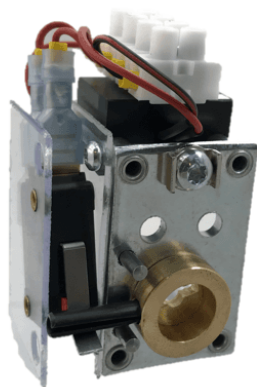

With LED option